

# LXT 18V

## HIGH-TORQUE GEAR RATIO DFR552



### PUSH DRIVE™ TECHNOLOGY

FOR MAXIMUM RUNTIME

UP TO

## 2,670 SCREWS

PER CHARGE ON A 5.0AH  
BATTERY

### SILENT CLUTCH

FOR DURABILITY AND  
REDUCED DRIVER NOISE

- **High Torque** – designed to suit heavy duty applications driving screws into materials such as fibre cement board and hardwood due to the high torque.
- **Quick Release Assembly** – designed with a screwless one touch clip for effortless attachment and removal, reducing down time.
- **Silent Clutch** – Silent clutch uses higher durability materials increasing operation efficiency and decreasing driver noise.
- **Ergonomically designed** – designed with optimised motor placement allowing for comfortable prolonged use in horizontal and vertical applications as weight is distributed evenly.
- **Push Drive Technology** – in lock-on mode the motor starts only when the fastener engages the material for longer run time and motor noise reduction.
- **eXtreme Protection Technology** – enhanced protection from dust and moisture, enabling safe use in outdoor applications and harsh environments.

High Torque

Ideally located reverse switch

Quick release assembly

Push Drive Technology

Silent clutch



## SPECIFICATIONS

SCREW STRIP SIZE	3.5-4.2 x 25-55mm
MAXIMUM POWER OUTPUT	440W
NO LOAD SPEED	0-4,500MIN <sup>-1</sup>
OVERALL LENGTH	396MM
WEIGHT (WITH BATTERY BL1860B)	2.2kg
VOLTAGE	18V



### QUICK CHANGE ATTACHMENT



New and improved casing attachment allows for quick attachment/removal reducing the trouble of reversing and replacing a bit

### DURABLE CASING




Improved durability by changing the material of the casing from plastic to aluminum.

### PUSH DRIVE TECHNOLOGY



Push drive technology allows the motor to rotate at full speed only when the screw is pressed against the board to reduce power consumption and noise

### DRIVE MODE INDICATOR

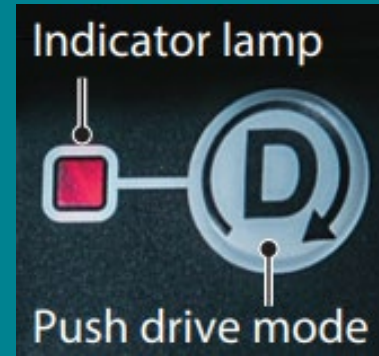


Indicator lamp to show when push drive mode has been activated

### REVERSE LEVER



Ideally located reverse switch lever providing users with quick access

### HIGH TORQUE POWER

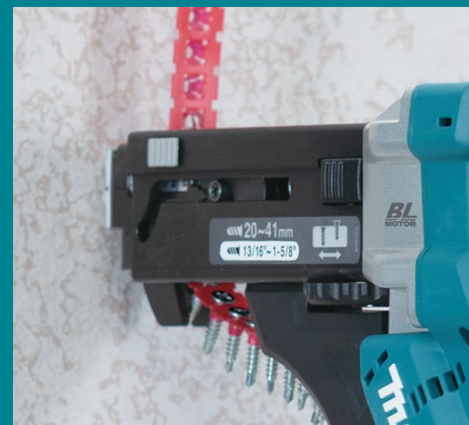

Higher torque rotation speed providing up to 4,500 RPM

	<p>191W94-5</p>	<p>COLLATED SCREW CASING 25-55MM</p>	<p>INCLUDED</p>
	<p>191V02-0</p>	<p>PH2 155MM SET *Part number is for a 5 pack Product comes with 3 Pcs</p>	
	<p>346317-0</p>	<p>BELT HOOK</p>	
	<p>191V04-6</p>	<p>SQ2 155MM 5PK</p>	<p>OPTIONAL</p>
	<p>191V06-2</p>	<p>PZ2 155MM 5PK</p>	